

DEADBOLTS FOR USE WITH SOLID BRASS, CONTEMPORARY, & TRADITIONAL COLLECTIONS

DIMENSIONS





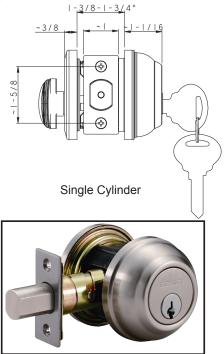



STANDARD SPECIFICATIONS

Door Prep	Cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4"	Latches	2-3/8" & 2-3/4" adjustable (9092 UL) Faceplate: 1" x 2-1/4" round corner Bolt: Brass with hardened steel rod. Full 1" throw		
Backset	Fits 2-3/8" and 2-3/4"	Strikes	1-3/4" x 2-1/4" Rd & Sq Corner (9111 & 9117) Includes Reinforcement Strike		
Door Thickness	1-3/8" ~ 1-3/4" door standard, 2-1/4" Ext. Kit Available	Wood Screws	Combination screws that suit both wood or metal door mounting Includes 3" Security Screws		
Cylinder	KW1 5-Pin standard (Solid Brass), SC4 6-pin Optional Deadbolts packed KA5	Door Handing	Not Required		
		Grade 2 Features	Protective Collar 3-Hr Fire Latch High Security Strike Plate Assembly		

PRICING

Model	Function	WT/LB	CTN QTY		US15 Satin Nickel	US26 Polished Chrome	US10B Oil Rubbed Bronze	US12P Tuscany Bronze
200-LU-G2	Single Cylinder	27 Lbs	20 Pcs	Item No.	330601	330606	330602	330610
				List Price	\$35.13	\$35.13	\$44.38	\$44.38
210-LU-G2	Double Cylinder	36 Lbs	20 Pcs	Item No.	340601	340606	-	340610
				List Price	\$44.29	\$44.29		\$54.56

FUNCTIONS

